

## Tinytag Plus Intrinsically Safe Dual Channel Temperature/ Relative Humidity (-40 to +85°C/0 to 100% RH)

### TGIS-1580

The TGIS-1580 Intrinsically Safe Tinytag from Gemini is an ATEX certified data logger for use in hazardous areas. The unit is robust and self contained, with a reputation for reliability.

This model is battery powered and measures both temperature and humidity using built-in sensors, providing cost effective environmental monitoring ideal for inaccessible locations.

Features include waterproof casing (rated IP68), two user-programmable alarms and multiple start/stop options. Data recorded by the TGIS-1580 is downloaded to PC via a cable; no expensive base station is required.

Gemini's Tinytag Explorer software provides a powerful, easy to use interface with the loggers, enabling visualisation of recorded data and the ability to set logging parameters.

#### Typical Applications

- Gas/Petroleum installation condition and process monitoring
- Chemical manufacture and storage
- Weapons lifting and storage
- Condition monitoring during the transportation of hazardous materials
- Chemical sterilisation
- Paint shop temperature and humidity monitoring

#### Features

- ATEX certified temperature and relative humidity recorder




EEx ia IIC T4 (Ta = -30° to 40°C)  
EEx ia IIC T3 (Ta = -30° to 75°C)

Certificate: Sira 03ATEX2325X

- 32,000 reading capacity
- Low cost cable download
- 2 user-programmable alarms
- Delayed and trigger-start options
- 3 stop options
- Antistatic, robust, waterproof case
- User-replaceable battery





EEx ia IIC T4 (Ta = -30° to 40°C)  
EEx ia IIC T3 (Ta = -30° to 75°C)

Certificate: Sira 03ATEX2325X


### Features

<b>Total Reading Capacity</b>	32,000 readings
<b>Memory type</b>	Non Volatile
<b>Trigger Start</b>	Magnetic Switch
<b>Delayed Start</b>	Relative / Absolute (up to 45 days)
<b>Stop Options</b>	When full After n Readings Never (overwrite oldest data)
<b>Reading Types</b>	Actual, Min, Max
<b>Logging Interval</b>	1 sec to 10 days
<b>Offload</b>	While stopped or when logging in minutes mode
<b>Alarms</b>	2 fully programmable; latch-able

### Reading Specification

<b>Temperature</b>	
<b>Reading Range</b>	-40°C to +85°C (-40°F to +185°F)
<b>Sensor Type</b>	10K NTC Thermistor (Internally mounted)
<b>Response Time</b>	25 min to 90% FSD in air

### Resolution and Accuracy

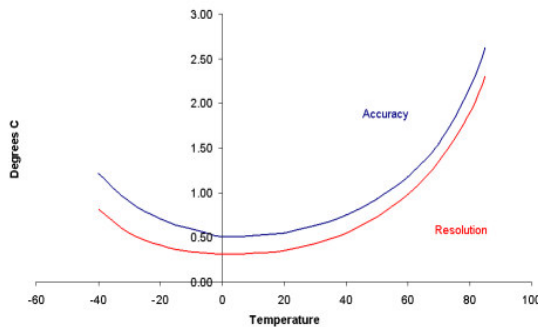


### Relative Humidity

<b>Reading Range</b>	0% to 100% RH
<b>Sensor Type</b>	Capacitive
<b>Accuracy</b>	±3.0% at 25°C / 77°F
<b>Reading Resolution</b>	Typically 0.5%RH
<b>Sensor Location</b>	External
<b>Response Time</b>	10 seconds to 90%

### RH Sensor Working Range

The working range for the RH sensor is shown in terms of relative humidity / temperature limits. Although the sensor will not fail beyond these limits, the accuracy will deteriorate.

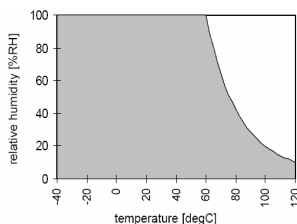

### Physical Specification

<b>IP Rating</b>	IP68 Waterproof (see notes)
<b>Operational Range*</b>	-40°C to +85°C (-40°F to +185°F)
<b>Case Dimensions</b>	
<b>Height</b>	34mm / 1.34"
<b>Width</b>	57mm / 2.25"
<b>Depth</b>	80mm / 3.15"
<b>Weight</b>	100g / 3.5oz

\*The Operational Range indicates the physical limits to which the unit can be exposed in a non IS rated area. The unit's IS certification is valid only between -30°C and +75°C (for further information please see the Approvals section of this data sheet).

### Notes

**Battery Type** SAFT LS14250 or LST14250 3.6V  
½AA Lithium Cell\*

**Replacement Interval** Every 2 years

\*To comply with the unit's IS certification one of these two types of battery must be used in this logger.

Batteries should be replaced in a non-hazardous area.

Before replacing the battery the data logger must be stopped.

Data stored on the logger will be retained after a battery is replaced.

If used at low temperatures data loggers should be allowed to warm to room temperature before they are opened to avoid condensation forming inside the unit.

The IP68 rating, which does not include the RH sensor, is valid to a depth of 15m (50ft) only when the unit's connector cap is securely fitted.

The logger is housed in a static-dissipative case and is not capable of causing ignition due to electrostatic discharge. Surface resistivity is less than  $1 \times 10^9$  ohms/square.

If moisture forms on the unit's RH sensor readings will become unpredictable. Once the sensor has dried out, and provided no residue is left behind, the unit should return to normal reading within 30 minutes.

Any dust or residue that is allowed to build up on the RH sensor will affect the unit's reading accuracy.

The sensor may be cleaned with de-ionised water or pure isopropanol but not with abrasive detergents as scratches or residue will affect the accuracy.

The sensor will resist small amounts of the following chemicals: formaldehyde, ammonia, carbon monoxide, sulphur dioxide, ethylene oxide, hydrogen chloride, hydrogen fluoride, hydrogen peroxide, nitrogen dioxide, methyl chloride, chlorine, freon, methanol, ethanol, isopropanol and ozone. It also offers resistance to ultraviolet rays.

Salt solutions may cause permanent damage as crystals forming within the porous layers affect moisture levels there.

